







S25030 STOPMASTIC 520

					
Ready for use	4 h at 20°C	Knifing application	0-300 μ	24 h at 20°C	P80 P120

Description

Filler

1K filler based on synthetic resins. Especially indicated for low film thickness knifing applications on large surfaces. Used for 1K paint processes.

Colour

White.

Characteristics

- Good adhesion
- Fast drying
- Good sanding

Specific weight (part A): 2,21 ± 0,02 g/ml

Substrate preparation

Stoppani 1K primers

Dry sanding with P 280-320 paper

Old coatings

Dry sanding with P 120-180 paper

Application

Knifing.

The product in its original can is covered with an antioxidant solution. This antioxidant solution allows you to store the product unaltered for a long period of time. Do not mix the product with this solution, it could form specks. Remove this antioxidant solution and replace it again just for the product's storage.


Mixing ratio

READY FOR USE

N° of knifing: 1 + 1 of refinish
Recommended film thickness: no more than 300 µ each coat,
Interval between coats: 4 h

Drying

	10°C	20°C	35°C
Sanding after	min. 48 h	min. 24 h	min. 12 h

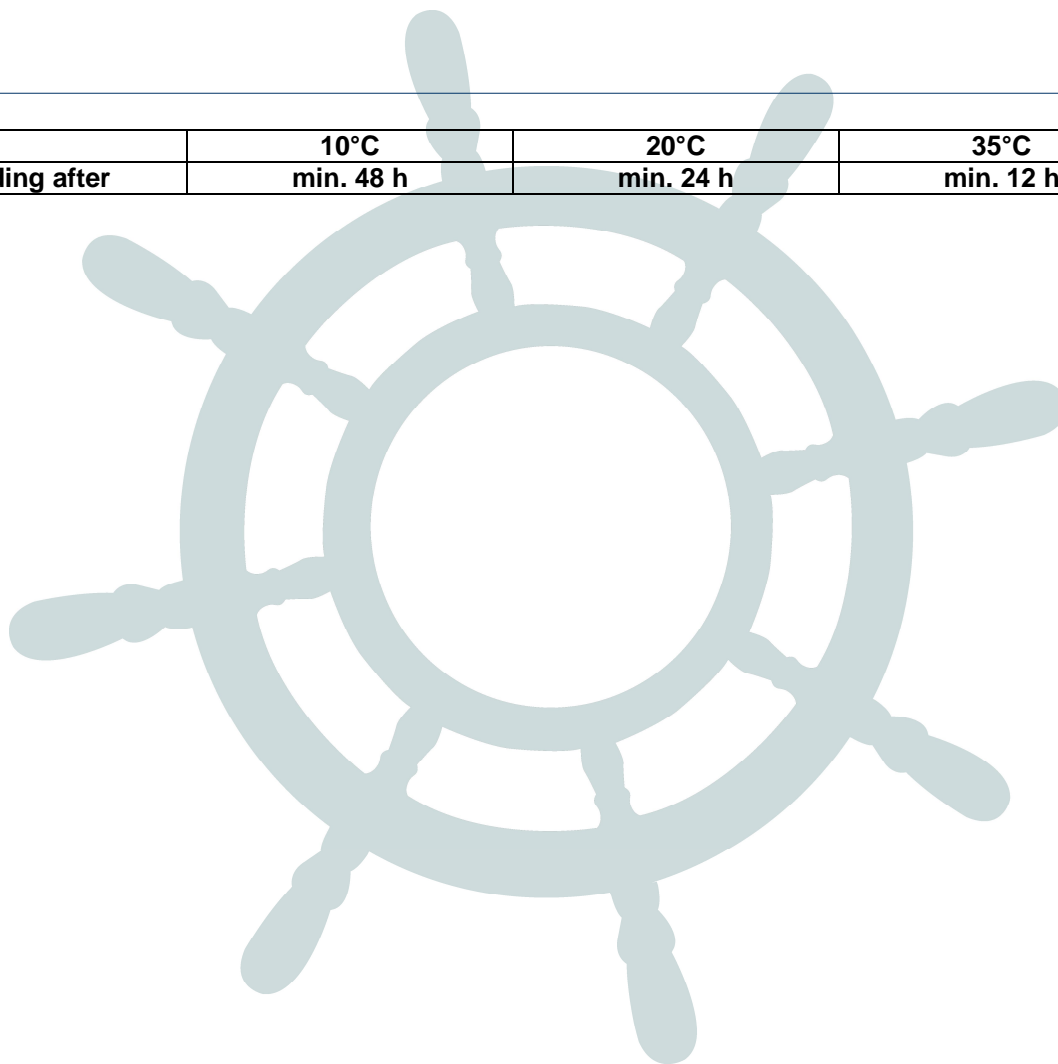

TECHNICAL DATA SHEET N° S132-GB
DATED 06/2015

All information contained in this data sheet is the result of carefully controlled tests and is correct to the best of Lechler's knowledge at the time of issue. Since conditions of use are beyond the control of the manufacturer, information contained herein is without warranty, implied or otherwise, and final determination of the suitability of any information or material for the use contemplated and the manner of use is the sole responsibility of the user. FOR PROFESSIONAL USE ONLY.